

4 x 800 mW Fiber Bragg Grating Stabilized 980 nm Pump Modules

C4 Series

Key Features

- Operating power ranges from 1840 – 3200 mW
- 35°C ~55°C internal temperature
- Low-profile 5.3 mm 14-PIN butterfly package
- Fiber Bragg grating stabilization
- Wavelength selection available
- Integrated thermoelectric cooler, thermistor, and monitor diode
- High dynamic range
- Excellent low-power stability

Applications


- Dense wavelength division multiplexing (DWDM) EDFAs
- High bit-rate, high channel-count EDFAs
- CATV distribution

Compliance

- Telcordia GR-468-CORE

The Lumentum C4 Series is quad-chip 980 nm pump laser module with each emitter independently controlled. It uses a number of revolutionary design steps to provide high optical power density within a compact space. The C4 series pump module incorporates the Lumentum high-reliability, high-efficiency 980 nm laser diode in a cooled fiber Bragg grating-stabilized 14-pin low profile butterfly design. The module meets the stringent requirements of the telecommunications industry, including Telcordia GR-468-CORE for hermetic 980nm pump modules.





The C4 Series pump module, which uses fiber Bragg grating stabilization to lock the emission wavelength, provides a noise-free, narrowband spectrum, even under changes in temperature, drive current and optical feedback. Wavelength selection is available for applications requiring the highest performance in spectrum control with the highest power available.

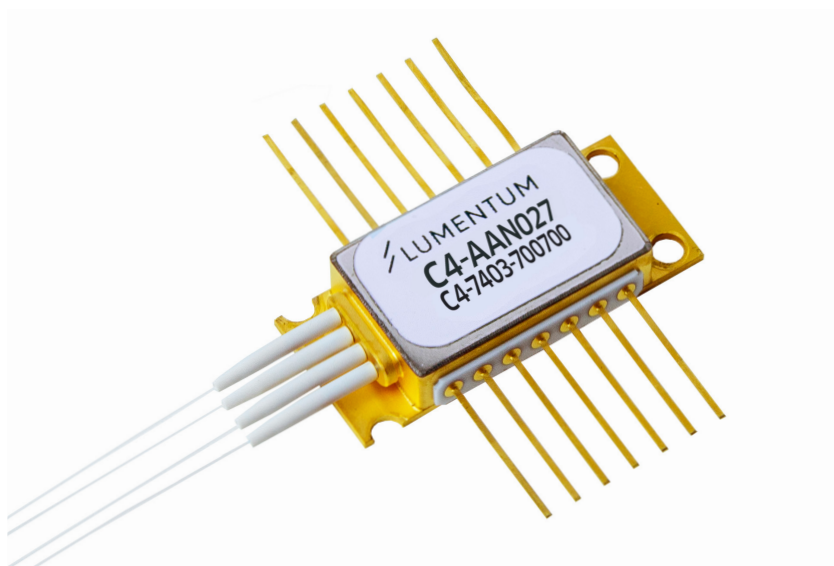

Dimensions Diagram

Package dimensions:

- Length (including boot and excluding pins): 38.3 mm
- Width: 40.5 mm (including uncut lead)
- Height: 5.3 mm

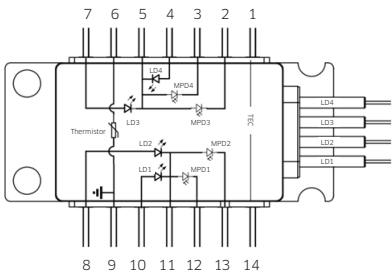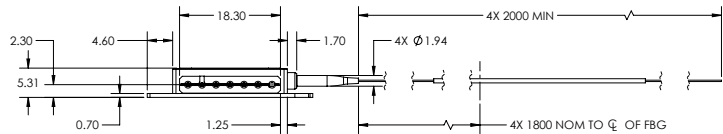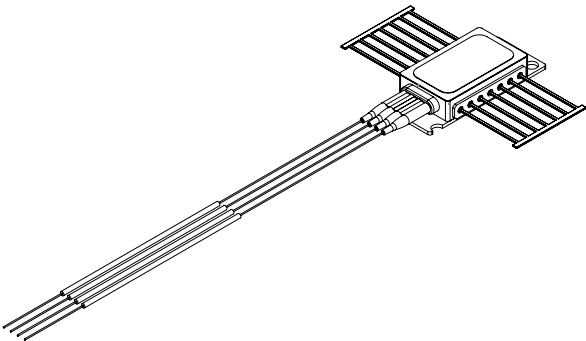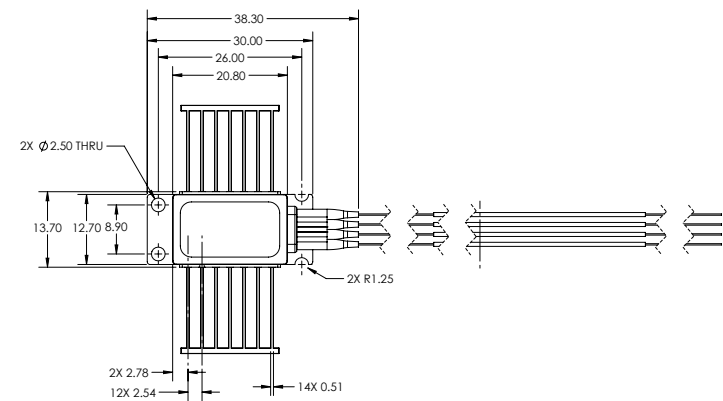

Pin Assignments

Pin	Description
1	TEC+
2	MPD3 CATHODE(-)
3	MPD4 CATHODE(-)
4	CH4 LD ANODE(+)
5	CH3, CH4 LD CATHODE(-) & MPD3, MPD4 ANODE (+)
6	THERMISTOR
7	CH3 LD ANODE(+)
8	CH2 LD ANODE(+)
9	THERMISTOR & CASE GROUND
10	CH1 LD ANODE(+)
11	CH1, CH2 LD CATHODE(-) & MPD1, MPD2 ANODE (+)
12	MPD1, CATHODE (-)
13	MPD2, CATHODE (-)
14	TEC (-)

Table 1 Absolute Maximum Ratings

Parameter	Symbol	Test Conditions	Value		Unit
			Minimum	Maximum	
Operating case temperature	T_{op}		-5	+75	°C
Storage temperature	T_{stg}	2000 hrs	-40	+85	°C
Laser Operating Temperature	T_{LD}		15	60	°C
LD reverse voltage	V_r		—	2	V
D4 LD forward current	$I_{f,max}$	Unlimited time	—	1800	mA
D4 LD current transient		20 μ s maximum	—	1900	mA
LD Reverse current			—	10	μ A
PD reverse voltage	V_{PD}		—	20	V
PD forward current	I_{PF}		—	10	mA
LD Electrostatic discharge (ESD)	V_{ESD}	C = 100 pF, R = 1.5 k Ω , HBM	—	1000	V
PD Electrostatic discharge (ESD)	V_{ESD}	C = 100 pF, R = 1.5 k Ω , HBM	—	500	V
TEC forward current	I_c		—	4	A
TEC reverse current	I_{rc}		-2.2	—	A
TEC voltage	V_c		—	4	V
Axial Pull Force		3X 10 sec.	—	5	N
Side Pull Force		3X 10 sec.	—	2.0	N
Fiber Bend Radius			16	—	mm
Atmospheric Pressure		Storage	11	—	kPa
Atmospheric Pressure		Operating	58	—	kPa
Relative Humidity	RH	Non-condensing	5	95	%
Lead soldering time		350°C	—	10	Sec

Absolute maximum ratings are the maximum stresses that may be applied to the module for short periods of time without causing damage. Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. Exposure to absolute maximum ratings for extended periods of time or exposure to more than one absolute maximum rating simultaneously may adversely affect device reliability. Specifications may not necessarily be met under these conditions.

Table 2 Operating Parameters of C4 Pump ($T_{case} = 0^\circ\text{C}$ to 75°C) for different Pop

Product Code	Maximum Operating Power (mW)		Maximum Operating Current (mA)		Minimum Kink-Free Power (mW)		Maximum Kink-Free Current (mA)	
	Low power Ports	High Power Ports	Low power Ports	High Power Ports	Low power Ports	High Power Ports	Low power Ports	High Power Ports
C4-xxxx-460460	460	460	885	885	506	506	965	965
C4-xxxx-500500	500	500	955	955	550	550	1045	1045
C4-xxxx-540540	540	540	1030	1030	594	594	1125	1125
C4-xxxx-600600	600	600	1135	1135	660	660	1250	1250
C4-xxxx-600660	600	660	1135	1250	660	726	1250	1380
C4-xxxx-600700	600	700	1135	1325	660	770	1250	1475
C4-xxxx-600800	600	800	1135	1550	660	880	1250	1800
C4-xxxx-650650	650	650	1230	1230	715	715	1360	1360
C4-xxxx-660660	660	660	1250	1250	726	726	1380	1380
C4-xxxx-700700	700	700	1325	1325	770	770	1475	1475
C4-xxxx-700800	700	800	1325	1550	770	880	1475	1800
C4-xxxx-720720	720	720	1370	1370	792	792	1530	1530
C4-xxxx-750750	750	750	1430	1430	825	825	1625	1625
C4-xxxx-800800	800	800	1550	1550	880	880	1800	1800

Note: xxxx denotes wavelength and tolerance per Table 3 below.

Table 3 Available Peak Wavelength Selection

Product Code	Minimum Peak Wavelength	Maximum Peak Wavelength
C4-7403-xxxxxx	973 nm	975 nm
C4-7603-xxxxxx	975 nm	977 nm

Note: xxxxxx denotes operating power per Table 2 above.

Table 4 Optical and Electrical Performance (BOL, $T_{case} = -5^{\circ}\text{C}$ to 75°C , P_f range = 30mW to P_{max})

Parameter	Symbol	Test Condition	Limits		Unit
			Minimum	Maximum	
Threshold current per port	I_{th} -BOL	—	—	125	mA
Operating forward current	I_{op}	—	—	Table 2	mA
Forward voltage	V_f	—	V_{min}	2.2	V
Fiber output power range	P_f	—	30 mW	P_{max} per Table 2	mW
Kink-free output power	P_{max}	If = I_{max} , Table 2	P_{max} per Table 2	—	mW
Center emission wavelength	λ_m	Over P_f range,	Table 3		nm
Power in pump band	P_{pump}	Pump band = $\lambda_m \pm 1.5$ nm, 60 mW <Pop< P_{max}	90	—	%
Power in pump band	P_{pump}	Pump band = $\lambda_m \pm 1.5$ nm, 30 <Pop<60 mW	80	—	%
Spectral width	$\Delta\lambda_{RMS}$	CW, over P_f range,	—	2.0	nm
Wavelength tuning vs. temperature	$\Delta\lambda/T$	$I_f = I_{op}$	0	0.01	nm/ $^{\circ}\text{C}$
Laser diode 10%-90% rise/fall time	t_r / t_f	Step response	—	100	ns
Return loss	RL	1480 – 1620 nm	—	9	dB
Optical power cross talk	—	Over P_f and T_{case} range	—	1	mW
Thermal cross talk	—	Over P_f and T_{case} range	—	3	$^{\circ}\text{C}/\text{A}$
Monitor diode response per LD	I_{BF}	Over P_{op} range	0.2	10	$\mu\text{A}/\text{mW}$
LD operating temperature	t_{LD}	$35^{\circ}\text{C} \sim 55^{\circ}\text{C}$, nominal	34	58	$^{\circ}\text{C}$
Thermistor resistance	R_{th}	$T_{set} = 45^{\circ}\text{C}$	9.5	10.5	k Ω
Thermistor Constant	T_{LD}	—	3700	4100	K
TEC current	TECI	T_{case} 0 to 75°C	—	2.12	A
TEC voltage	TECV	T_{case} 0 to 75°C	—	2.43	V

Table 5 Total Module Power Consumption at $T_{LD} = 55^{\circ}\text{C}$ (BOL/EOL, $T_{CASE} = 75^{\circ}\text{C}$)

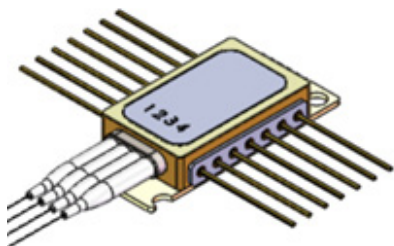
Product Code	TEC Current (A) BOL/EOL	TEC Voltage (V) BOL/EOL	TEC Power Consumption (W) BOL/EOL	Total Module Power Consumption (W) BOL/EOL
C4-xxxx-460460	1.26/1.32	1.67/1.70	2.0/2.1	7.5/8.3 (Typ. 6.4/7.1)
C4-xxxx-500500	1.31/1.37	1.73/1.75	2.1/2.3	8.2/9.1 (Typ. 7.0/7.7)
C4-xxxx-540540	1.36/1.43	1.78/1.80	2.2/2.4	8.9/9.9 (Typ. 7.6/8.4)
C4-xxxx-600600	1.43/1.53	1.85/1.90	2.5/2.7	10/11.2 (Typ. 8.4/9.4)
C4-xxxx-600660	1.49/1.60	1.91/1.96	2.7/2.9	10.7/12.1 (Typ. 9.0/10.0)
C4-xxxx-600700	1.53/1.66	1.94/2.00	2.8/3.1	11.1/12.7 (Typ. 9.4/10.5)
C4-xxxx-600800	1.65/1.86	2.06/2.17	3.2/3.9	12.7/15.0 (Typ. 10.4/11.9)
C4-xxxx-650650	1.51/1.62	1.93/1.99	2.7/3.0	11.0/12.4 (Typ. 9.2/10.4)
C4-xxxx-660660	1.53/1.65	1.95/2.01	2.7/3.1	11.2/12.7 (Typ. 9.4/10.6)
C4-xxxx-700700	1.60/1.75	2.01/2.10	3.0/3.5	12.0/13.9 (Typ. 10.1/11.4)
C4-xxxx-700800	1.73/1.96	2.13/2.26	3.4/4.2	13.6/16.3 (Typ. 11.2/12.8)
C4-xxxx-720720	1.63/1.81	2.04/2.15	3.1/3.6	12.5/14.5 (Typ. 10.5/11.9)
C4-xxxx-750750	1.70/1.90	2.11/2.23	3.3/4.0	13.3/15.7 (Typ. 11.0/12.6)
C4-xxxx-800800	1.83/2.12	2.22/2.43	3.7/4.8	14.8/18.1 (Typ. 12.0/14.0)

Table 6 HI 1060 Fiber Nominal Characteristics and Tolerances

Parameters	Specification
Cutoff wavelength	920 nm
Maximum attenuation at 980 nm	2.1 dB/km
Cladding outside diameter	125 $\pm$ 1 μ m
Coating outside diameter	245 $\pm$ 10 μ m
Core-cladding concentricity	$\leq$ 0.5 μ m
Mode field diameter	5.9 $\pm$ 0.5 μ m

Package Label

LD1 to LD4 ports are marked as shown.

**User Safety****Safety and Operating Considerations**

The laser light emitted from this laser diode is invisible and may be harmful to the human eye. Avoid looking directly into the fiber when the device is in operation.

CAUTION: THE USE OF OPTICAL INSTRUMENTS WITH THIS PRODUCT INCREASES EYE HAZARD.

Operating the laser diode outside of its maximum ratings may cause device failure or a safety hazard. Power supplies used with this component cannot exceed maximum peak optical power.

CW laser diodes may be damaged by excessive drive current or switching transients. When using power supplies, the laser diode should be connected with the main power on and the output Voltage at zero. The current should be increased slowly while monitoring the laser diode output power and the drive current. Careful attention to heat sinking and proper mounting of this device is required to ensure specified performance over its operating life.

ESD PROTECTION—Electrostatic discharge (ESD) is the primary cause of unexpected laser diode failure. Take extreme precautions to prevent ESD. Use wrist straps, grounded work surfaces, and rigorous antistatic techniques when handling laser diodes.

Laser Safety

The Lumentum pump laser module emits hazardous invisible laser radiation.

Due to the small size of the pump laser module, the box packaging is labeled with the laser radiation hazard symbol and the laser safety warning shown below.

Laser classification for the system depends on the system control circuit and any laser safety features provided.

This diode-pumped laser module is not 21CFR 1040.10 or IEC 60825-1: 2014 certified. It is a component intended for system integration.

Compliance with 21CFR 1040.10 and/or IEC 60825-1:2014 will need to be determined at the system level.

Lumentum has registered this laser with the FDA/CDRH as an

OEM laser component. Please contact Lumentum for an FDA/CDRH accession number for this laser component.

Packaging Labeling

Laser radiation safety warning Laser classification per IEC 60825-1:2014
Maximum output power 2W per port

Ordering Information

For more information on this or other products and their availability, please contact your local Lumentum account manager or Lumentum directly at customer.service@lumentum.com.

D4 - -

Peak Wavelength	Code
973.0 to 975.0 nm	7403
975.0 to 977.0 nm	7603

Maximum Operating Power	Code
460mW / 460mW / 460mW / 460mW	460460
500mW / 500mW / 500mW / 500mW	500500
540mW / 540mW / 540mW / 540mW	540540
600mW / 600mW / 600mW / 600mW	600600
660mW / 660mW / 660mW / 660mW	600660
700mW / 600mW / 600mW / 700mW	600700
800mW / 600mW / 600mW / 800mW	600800
650mW / 650mW / 650mW / 650mW	650650
660mW / 660mW / 660mW / 660mW	660660
700mW / 700mW / 700mW / 700mW	700700
800mW / 700mW / 700mW / 800mW	700800
720mW / 720mW / 720mW / 720mW	720720
750mW / 750mW / 750mW / 750mW	750750
800mW / 800mW / 800mW / 800mW	800800



North America
Toll Free: 844 810 LITE (5483)

Outside North America
Toll Free: 800 000 LITE (5483)

China
Toll Free: 400 120 LITE (5483)

© 2026 Lumentum Operations LLC
Product specifications and descriptions in this document are subject to change without notice.